


SPALMATORE COATING UNIT

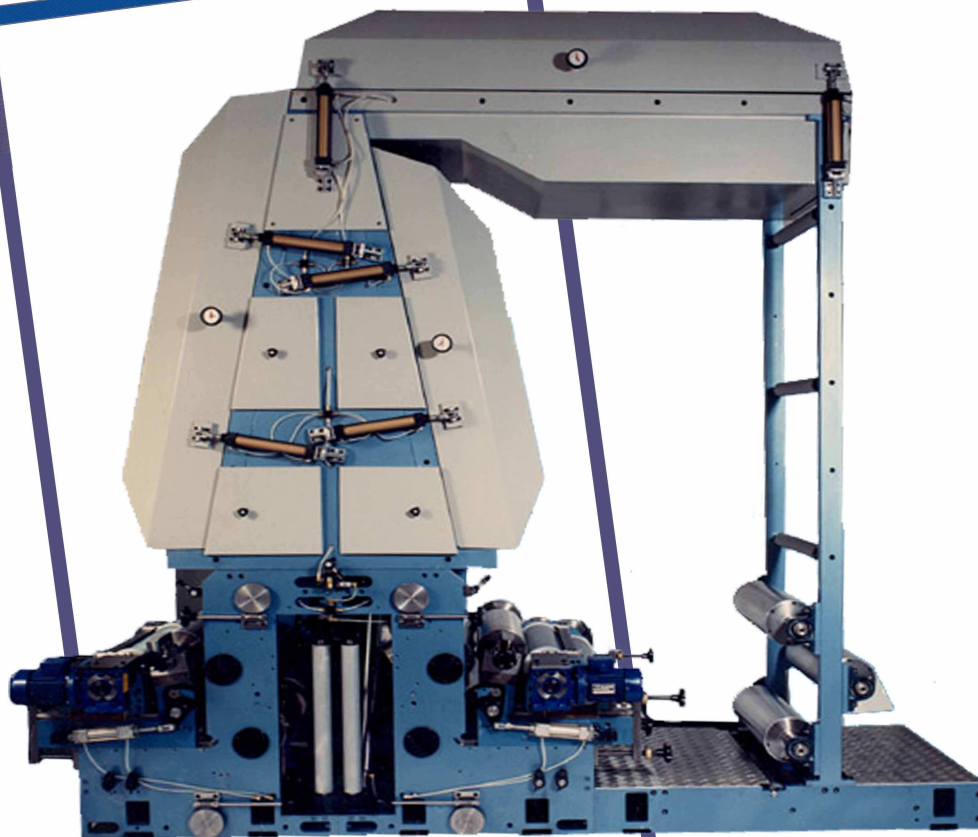

Gruppo spalmatore a formato variabile da min. 16" a max. 32", per esecuzione di spalmature colla, oro, argento e stampa flessografica.

Applicazione di adesivi reversibili, irreversibili; vernici mascheranti e con profumi; sensibilizzanti per trattamento anteriore/posteriore, carbonature a caldo e a freddo.

Coating unit, variable size from min. 16" to max. 32", for the application of glue, gold, silver and flexo printing.

Reversible/irreversible glues application, masking lacquers and micro-encapsulated perfumes; sensitisers for previous and after treatment, hot and cold carbon melts.

Caratteristiche tecniche:
-Passaggio carta : 520 mm.
-Velocità max. fino a 250mt/min.

Cilindri retinati:
-28 linee per oro/argento da grattare
-60 linee per colla aumentabile/removibile, per oro/argento da cancellare ad acqua o alcool.
-120 linee per stampa flessografica.

Technical features:
-Paper path : 520 mm.
-Max speed up to 250m/min

Screened cylinders:
-28 lines for gold/silver to be scratched off.
-60 lines for adhesive which can be strengthened and removed, for gold/silver to be removed with water or alcohol
-120 lines for flexo printing.

NEWMEC s.r.l.

Via B. Angelico, 21 - 20052 Monza (Mi) Italy
Tel. +39.039.20.24.452
Fax +39.039.20.24.483
www.newmec.it - info@newmec.it